


OUR SCALE GUARANTEE

- Easy to setup
- Easy to use
- Easy replacement parts
- · Easy calibration/phone support
- Long warranty support
- 30 day money back guarantee
- Lowest price guarantee

CALL NOW: 800-722-9808

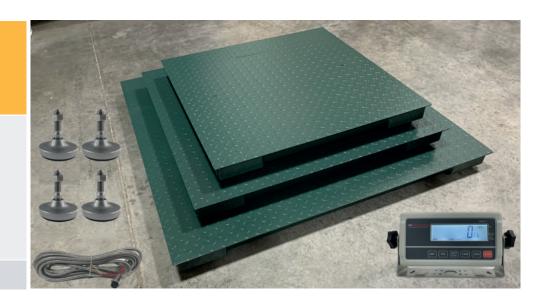

SWUS-TB FLOOR SCALE

Our floor scale is designed for applications that require a reliable, durable, and efficient scale for years to come. US-TB comes in three size: 36"x36", 48"x48", and 60"x60" in a 1,000 lb to 10,000 lb selectable capacities. Our bright, large, and easy to read 3011 indicator is included. Built with a robust 200% overload protection and impact protected load cells. Our series will provide a consistent accuracy for years to come.

ZWUS-TB		
MODEL NUMBER	CAPACITY	PLATFORM SIZE
3636	1,000 lb x 0.2 lb, 5,000 lb x 0.5 lb, or 10,000 lb x 2 lb	Carbon Steel Platform 36"x36"
4848	1,000 lb x 0.2 lb, 5,000 lb x 0.5 lb, or 10,000 lb x 2 lb	Carbon Steel Platform 48"x48"
6060	1,000 lb x 0.2 lb, 5,000 lb x 0.5 lb, or 10,000 lb x 2 lb	Carbon Steel Platform 60"x60"

This Scale constructed with a diamond plated steel deck. The six channel steel bracing protect our four shear beam load cells. Each load cell is built to shock absorbing impacts, ball swivel feet for vibrations, and a 200% overload protection. The scale is backed by our 3 Year Manufacturer warranty. Each model is factory calibrated for accuracy, including 18' steel braided cable, and LCD digital.

US-TB FEATURES:

- Solid 1/4" Thick Steel Plate
- Four 350 Ohms Load Cells
- · 6 Channel Steel Bracing
- 200% Overload Protection
- LCD Digital Indicator (Rechargeable)
- A/C Adapter 110 Volts
- Four Swivel Leveling Feet
- 20 ft Braided Cable
- Platform Height 3"
- Factory Calibration
- 5 Year Manufacturer Warranty Steel Deck
- 2 Year Manufacturer Warranty Electronics
- NTEP Approved 19-133A1 (Legal for trade)





3011 LCD indicator features large 1" digits for an easy to read display of the calculated weight. Our NTEP approved (legal for trade) indicator can be used in a variety of weighing applications. Such as livestock, recycling, Itl freight, fishing applications, and distilleries. The indicator is commonly used with our bench scales, floor scales, shipping scales, and pallet jack scales. The 3011 indicator powers up to (4) 350 ohm load cells, has a built in bright LCD display, and. a rechargeable battery that lasts up to 80 hours. The easy to use indicator features functions for: accumulation, animal weighing, and tare function. Our 3011 is easy to use and can be calibrated by any user.

SWUS-3011 INDICATOR FEATURES

- Automatic Zero Tracking (AZT)
- Initial Zero Setting Mechanism (IZSM)
- Automatic Zero Setting Mechanism (AZT)
- · Semi-Automatic Zero (Push Button) Zero
- Semi-Automatic (Push Button) Tare
- AC/DC Power
- RS-232
- · Battery Saving Feature
- LCD Display
- Motion Detection
- Unit Key
- Ib/oz/kg/g units
- Battery Operation with Low Battery Indication
- Gross/Net Display
- Gross/Net Weight Accumulation
- NTEP Approved 19-135A1 (Legal for trade)

