

Why would anyone need a Strip Door?



GO GREEN!

ENERGY SAVING - Always open, Always closed!!

DFX Strip doors reduce the loss of heated and cooled air by up to 90%, while preventing the flow of dust and fumes to areas sensitive to these contaminants.

Protection

DFX strip doors protect your warehouse from the dread of winter, drafts and gusts which plunge the mercury inside to intolerable and unworkable temperatures. DFX strip doors will make inside temperatures more comfortable by blocking drafts and flurries while dock and receiving doors stay open.

Economical

DFX Strip doors are less expensive than conventional doors. No motors or moving parts to break. Replace only individual strips when needed.

Sound Control

DFX strip are an excellent noise barrier. The clear PVC formula is inherently sound resistant. Strips can be installed in areas where loud machinery needs to be subdued, in computer centers to control sound, and in areas to separate offices from manufacturing.

USDA Certified

- DFX Strip door materials have been certified as being acceptable for use in feder-ally inspected meat and poultry plants as strip doors for handling packaged products in and out of freezers.
- DFX Strip doors can be cleaned easily with soapy water.



SAVES MONEY\$\$ • ENERGY • EASILY MAINTAINED



Strip Doors Features a variety of material formulations to suit your application and our Heavy Duty Universal Bracket comes standard with every strip door kit.




Standard Clear - For use in interior and exterior applications above freezing. 30°(F) to 150°(F)
Standard Clear Ribbed - For use in interior and exterior applications above freezing - more durable than Standard Clear and scratch resistant.

Low Temp Clear - For use in interior applications in ranges of -30°(F) to 100°(F)

Low Temp Reinforced - For use in interior applications below 40 degrees F

Low Temp Clear Ribbed - For use in interior applications below 40 degrees F - more durable than Low Temp Clear and scratch resistant

Safety Orange - To outline parts of doors that are unsafe for passage because of nearness to walls, irregular aisles, etc.



Overlap Layouts

Standard Overlap

Full Overlap



DFX STRIP DOORS ARE MADE AND SOLD BY...



-QUICK SHIP AVAILABLE
 -COMPETITIVE PRICES
 -ALL DOORS MADE TO ORDER
 -F.O.B. Houston, TX
 P. O. Box 562, Humble, TX 77347


Traffic Type	Suggested Use	Strip Overlay	Thickness
Light - 8" Strips	Int. doors to 10' H and ext. doors to 8' H. Int. partitions and enclosures,	50%	.080"
Medium - 12" strips	Interior doors and exterior doors from 10' to 15' H, noise enclosures, and secondary cooler doors.	67%	.12"
Heavy - 16" strips	Heavy equipment traffic doors 14' and higher. Maximum noise control.	75%	.16"

The above chart reflects general suggestions only. Your application, special circumstances and size of strip doors needed, may change the above suggestions.


MONEY-SAVING ROLL STOCK!

For unique configurations, you can purchase quality DFX or DFX Ribbed (see above) roll stock in thicknesses from .04" to .160", 4" to 48" wide. Colors of safety orange, amber, as well as clear are available. All edges are rounded. The rolls come in 60 to 500 ft lengths of uncut material, depending on width and ga. Buy in Bulk & cut your own strips to save \$, Call, we can help determine how much material is required for your project.


DFX Universal Mounting Hardware



Header Mount to bottom surface of overhead doorway




Wall Mount to wall surface immediately over doorway



Threaded Rod suspended by clamp & 1/2" rod from overhead beam

Mounts Three Ways!

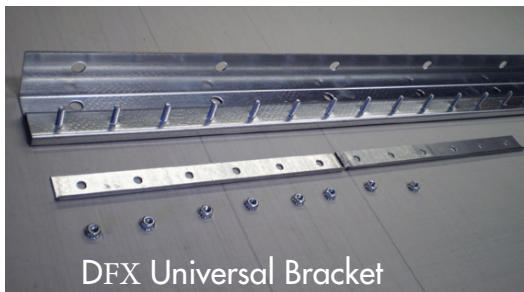

DFX Universal Bracket

Whether for flush, wall or suspend mount, Universal Mounting Strip Door Hardware has you covered! The 14-gauge galvanized steel construction, permanent 1/4" studs, reinforcement plates and lock nuts are all included in this "turn key" package. Holes are pre-drilled for mounting or suspension.